

DirectIP™ 12-port Gigabit PoE Switch

DH-2112PF


- Individual port for data transmission to DirectIP™ NVR
- PoE (IEEE 802.3af, IEEE 802.3at) compliant
- Maximum per-device PoE delivery of 150W available for 1~8 RJ45 ports
- Central power control for greater network utility
- Supports 10 x RJ45 ports and 2 SFP slots

SPECIFICATIONS

SYSTEM	
CPU	Embedded MIPS 24Kc 400MHz
System Memory	128MB SDRAM, 32MB Flash
Switching Capacity	24Gbps
CONNECTIVITY	
Copper Service Port	8 RJ45 Connectors (10/100/1000BASE-T)
Copper Uplink Port	2 RJ45 Connectors (10/100/1000BASE-T)
Optical Uplink Port	2 SFP Slot (1000BASE-X)
PoE POWER	
Supported Standards	IEEE 802.3af-2003 / IEEE 802.3at-2009
PD Connection	Up to 8 IEEE 802.3af PDs or up to 4 IEEE 802.3at PDs
PSE Power Budget	150W
GENERAL	
Dimensions (W x H x D)	330mm x 44mm x 204mm (13.0" x 1.7" x 8.0")
Weight	2.31kg (5.09lbs)
Operation Temperature	-20°C ~ +50°C (-4°F~ 122°F)
Power Input	AC100-240V, 50-60Hz, 2.1A
Power Consumption	200W
Certifications	FCC, CE, KC



DIMENSIONS

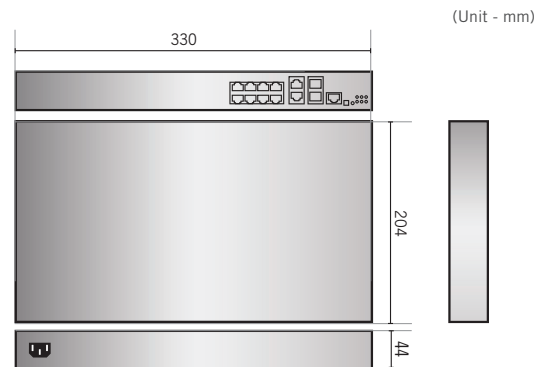

DirectIP™ 28-port Gigabit PoE Switch

DH-2128PF

- Individual port data transmission to DirectIP™ NVR
- PoE (IEEE 802.3af, IEEE 802.3at) compliant
- Maximum per-device PoE delivery of 400W available for 1~24 RJ45 ports
- Central power control for greater network utility
- Supports 26 x RJ45 ports and 2 SFP slots

SPECIFICATIONS

SYSTEM	
CPU	Embedded MIPS 24Kc 400MHz
System Memory	128MB SDRAM, 32MB Flash
Switching Capacity	56Gbps
CONNECTIVITY	
Copper Service Port	24 RJ45 Connectors (10/100/1000BASE-T)
Copper Uplink Port	2 RJ45 Connectors (10/100/1000BASE-T)
Optical Uplink Port	2 SFP Slot (1000BASE-X)
PoE POWER	
Supported Standards	IEEE 802.3af-2003 / IEEE 802.3at-2009
PD Connection	Up to 24 IEEE 802.3af PDs or up to 13 IEEE 802.3at PDs
PSE Power Budget	400W
GENERAL	
Dimensions (W x H x D)	440mm x 44mm x 220mm (17.3" x 1.7" x 8.7")
Weight	3.13kg (6.90lbs)
Operation Temperature	-20°C ~ +50°C (-4°F~ 122°F)
Power Input	AC100-240V, 50-60Hz, 4.8A
Power Consumption	450W
Certifications	FCC, CE, KC



DIMENSIONS

