

DC-S6261X

2MP Mini PTZ Camera



- Full HD (1080p) resolution
 - PoE (IEEE 802.3af Class 3), 12V DC
- AF optical zoom lens (f=5.3 - 64mm), 12x zoom
 - Compact Size
- Two-way audio and Alarm in / out
 - Easy and Quick Installation

SPECIFICATIONS

Video	
Image Sensor	1/2.8"
Max. Resolution	1920 x 1080
Scanning Mode	Progressive Scan
Lens Type	AF Zoom Lens
Focal Length	5.3 ~ 64mm
Aperture	F1.6 ~ F2.8
Iris Control	DC Iris (Hall Sensor)
Angular Field of View	Wide : 58.2o(H), 34o(V), 65.3o(D) Tele : 4.83o(H), 2.8o(V), 5.7o(D)
Min. Illumination	COLOR : 0.1 lux @ F1.6 B/W : 0.01 lux @ F1.6
Dynamic Range	120dB (True WDR)
Electronic Shutter Speed	Auto / Manual (1/30 ~ 1/10,000), Anti-Flicker, Slow Shutter (1/7.5, 1/15)
Day and Night	Yes (ICR)
Image Setting	Exposure, White Balance, Self-Adjusting Video Mode(Sharpness, Contrast, Colors, Brightness Control)
Backlight Compensation	BLC
Mirroring / Pivot	Horizontal / Vertical / Pivot
Image Stabilizer	Yes (EIS)
De-fog	Yes
Privacy Masking	8 Zones
Intelligent Video	Video Motion Detection, Active Tampering Alarm, Trip Zone
Pan/Tilt/Rotate	
Pan Range	360° (Endless)
Pan Speed	0.02~240°/sec (preset 420°/sec)
Tilt Range	180° (0~180°)
Tilt Speed	0.02~240°/sec (preset 420°/sec)
Preset	256ea
Network	
Video Compression	H.265, H.264 (MP), M-JPEG
Intelligent Codec	Yes
Bitrate Control	H.264 - CBR / VBR, H.265 - CBR / VBR
Audio Compression	ADPCM 16K, G.726, G.711 u-Law, G.711 a-Law
Two-way Audio	Yes
IP Camera Protocol	DirectIP 2.0, ONVIF Profile S/T
Max. Frame Rate	30ips : 1920 x 1080(WDR)
Supported Resolution	1920x1080, 1280x720, 640x360, 352x240
Multi-video Streaming	Quadruple Streaming
Network Protocols	DirectIP 2.0 Protocol, IPv4, IPv6, RTP/RTSP/TCP, RTP/RTSP/HTTP/TCP, RTP/UDP RTSP/TCP, HTTP, HTTPS, FTP, SNMP, SMTP, FEN, mDNS, uPNP, SNMPv2
Security	Digest authentication, Password Protection, User access log, IP Filtering, IEEE802.1x(EAP-TLS), Chained Fingerprint, SSL Encryption, HTTPS Encryption
Ethernet	RJ45 (10/100BASE-T)
Recording Session Buffer (NLTSec)	Yes (Up to 60MB)
Edge Storage	micro SD/SDHC/SDXC, Smart Failover (Up to 512GB)
Alarm and Event	
Trigger Event	Motion Detection, Alarm in, Audio detection, Tampering, Trip Zone
Event Notification	Remote S/W, Email (with Image)
Audio Alarm	Yes
Audio In / Out	1 / 1
Alarm In / Out	1 / 1
Environmental	
Operating Temperature	-10°C ~ +50°C (+14°F ~ +122°F) *Starting up at above 0°C (32°F)
Operating Humidity	0% ~ 90%
Electrical	
Power Source	12VDC, PoE IEEE 802.3af (Class 3)
Power Consumption	12VDC, 9.2W / PoE (IEEE 802.3af Class 3), 10W
Approval	FCC, CE(50130-4), KC, UL
Mechanical	
Dimensions	Ø155mm x 158.1mm (Ø6.1" x 6.22")
Weight	1.0 kg




PRODUCT IMAGE



DIMENSIONS

Unit - mm (inch)

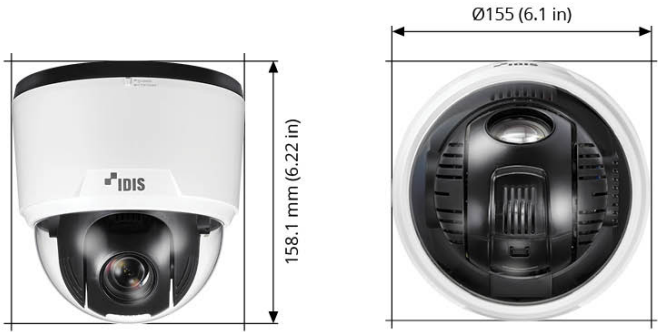

ACCESSORIES (OPTIONAL)

DA-MA2100	DA-WM2050	DA-JB2200	DA-CM2050
DA-MA2100	WALL MOUNT	JUNCTION BOX	CEILING MOUNT
DA-LM2000	DA-RM2000	DA-FM4600	
Pole Mount	Corner Mount	Flush Mount	

ACCESSORY CONFIGURATION BY INSTALLATION ENVIRONMENT

PRODUCT	INSTALLATION ENVIRONMENT	ACCESSORY CONFIGURATION
DC-S6261X	WALL	 DA-MA2100 Model:DA-MA2100
		+
		 WALL MOUNT Model:DA-WM2050
		or
	CELLING	 JUNCTION BOX Model:DA-JB2200
		 DA-MA2100 Model: DA-MA2100
		+
		 CEILING MOUNT Model: DA-CM2050
		or
	POLE	 JUNCTION BOX Model: DA-JB2200
		 DA-MA2100 Model: DA-MA2100
		+
		 WALL MOUNT Model: DA-WM2050
		+
		 POLE MOUNT Model: DA-LM2000
	CORNER	 DA-MA2100 Model:DA-MA2100
		+
		 WALL MOUNT Model:DA-WM2050
	ETC	+
		 CORNER MOUNT Model:DA-RM2000
	ETC	 FLUSH MOUNT Model: DA-FM4600