

DV-3200

AI in the Box



- AI in the BOX with IDIS Solution Suite
 - [IDLA] Superior Accuracy deep-learning engine
- Compatible with IDIS Deep-Learning Analytics (IDLA)
 - [IDLA] Object classification suitable for CCTV application
- 2U rack mount chassis
 - [IDLA] Simple configuration and Zero calibration

SPECIFICATIONS


General	
Supported Service	IDIS Solution Suite IDLA VA Service
Supported Version	Version 3.6.4 or Higher
Operating System	Microsoft® Windows 10 IoT Enterprise
Processor	Intel® I5-10500, 3.1GHz
Memory	DDR4 PC-25600, 16GB
Channels available for Analytics	Up to 64ch in condition of 640x360@5ips video input
IDLA Processing Unit	NVIDIA A2000, 12GB
Network	
Network Connection	2 GbE RJ-45 Ports (1000Base-T)
Interface	
Video Outputs	2 HDMI 2.0
USB	6 (2 Front USB 2.0 + 4 Back (3 USB 3.0 TYPE-A + 1 TYPE-C))
Environmental	
Operating Temperature	0°C to 40°C (32°F to 104°F)
Operating Humidity	0% - 90%
Electrical	
Power Input	100-240V~, 50/60 Hz, 6.0 - 3.0A
Power Consumption	270W
Approval	FCC, CE, CB, UL, PSE, KC
Mechanical	
Unit Dimensions (W x H x D)	482.6mm x 88mm x 523.3mm (19" x 3.5" x 20.6")
Unit Weight	11.8kg (26.01lb)



PRODUCT IMAGE



DIMENSIONS

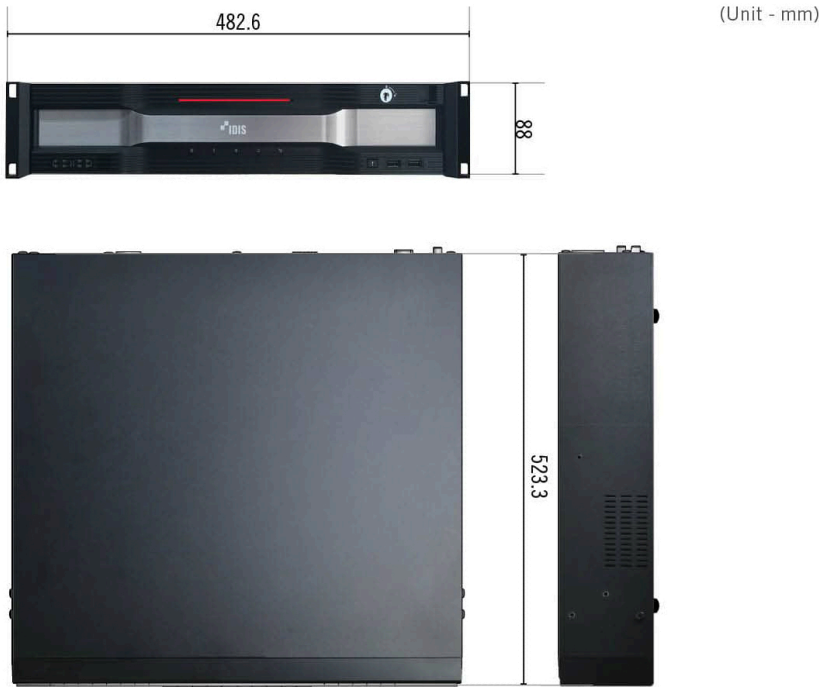

(Unit - mm)

