

Maximum Safety

Introduction

JAVIN sliding barrier are ideal for those who are unwilling to compromise on high security and maximum personal safety. With its height 1800mm wing, immediately separates large number of people. Aesthetically modern and contemporary rapid separation of persons for maximum personal safety.

Functionality

- » High separation with rapid passage of persons
- » Flexible lane configuration
- » Easy to integrate most access control
- » Intuitive sensors detect tailgating
- » Smooth, sliding motion gate
- » Automatic opening in case of power cut or emergency

TECHNICAL SPECIFICATIONS

General Specification

Operation	Automatic. Fail-safe (In the event of power outage, sliding door automatic open)
Opening / Closing Speed	0.9 second
Direction	Single or bi-directional
Working Environment	Indoor or outdoor
LED Light	Entry or No-Entry display direction arrows
Passage Per Minute	20~35 persons
Opening / Closing Cycle	3,000,000
Working Temperature	Indoor/outdoor (use a canopy cover) -10°C—50°C, Relative humidity: ≤90%
Communication Interface	RS485

Physical

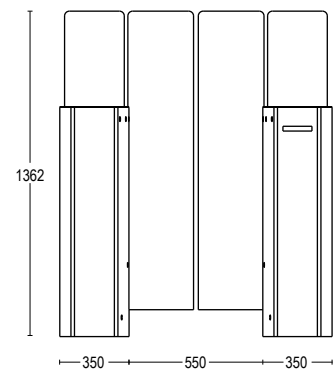
Dimensions	350(W) x 1400(D) x 980(H)mm
Housing Material	SUS304 stainless steel optional to use SUS316L
Input Interface	Dry contact signal or +12V signal or pulse

Electrical

Working voltage	AC230 ±10% 50/60HZ ±10%
Electronic motor	Brushless motor 24V 40W with fully auto model

**JL5060**

Dimension

Front View**Side View**