


## Slimmest Access Gate Range

### Introduction

JAVIN JS3018 access gate combining modern design with practical function. The frameless gate allows for easy movement in both directions with its smooth swinging wing. Perfect for everyone including those with disabilities and makes handling large deliveries simple. JS3018 easy to use and no training is required. The intuitive LED lights that simplify the walk-through experience - green, red and blue. Available single side wing up to 900mm wide or double wing version up to 1800mm.

### Functionality

- » Frameless Modern design enhance space a modern sleek look.
- » Bi-Directional movement allow passage in both directions.
- » Ideal for everyone include those with disabilities and large delivery.
- » Customizable single side wing up to 900mm wide or double gate up to 1800mm in passage width.
- » Intuitive LED guiding users with signals for in user, authorized and standby.
- » Enhance safety motion sensors are available for added security.

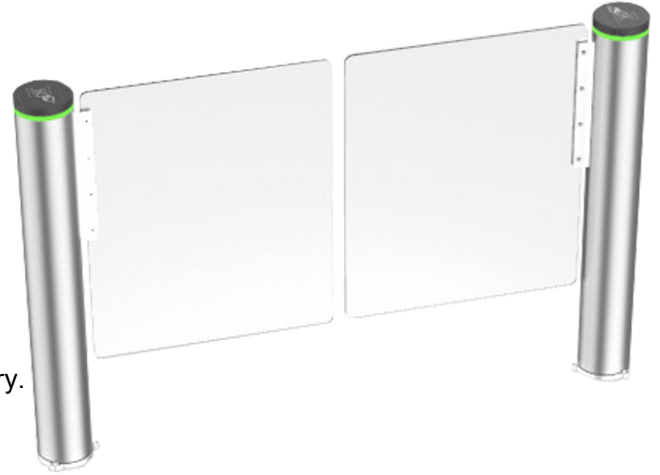

**JS3018**

## TECHNICAL SPECIFICATIONS

### General Specification

Operation	Automatic. Fail-safe (In the event of power outage, swing door automatic open)
Opening / Closing Speed	0.9 second
Direction	Single or bi-directional
Working Environment	Indoor or outdoor
LED Light	Blue - Standby, Green - Authorized, Red - Closing
Passage Per Minute	20~35 persons
Opening / Closing Cycle	5,000,000
Working Temperature	Indoor/outdoor (use a canopy cover) -10°C—50°C, Relative humidity: ≤90%
Input Interface	RS485, Dry contact signal or pulse

### Physical


Dimensions	168(W) x 1000(H)mm
Housing Material	SUS304 stainless steel optional to use SUS316L
Wing Dimension Height	Single side up to 900mm, Double side up to 1800mm 900mm (standard) up to 1800mm

### Electrical

Working voltage	AC 100-240V ±10% 50/60HZ ±10%
Electronic motor	Servo motor 200W DC24V

### Dimension

Front View

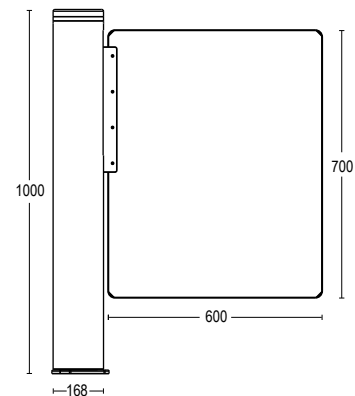

Side View

